Monogram™

ZET837BBBB - GE Monogram™ 30" Single Convection Wall Oven

Dimensions and Specifications (in inches)

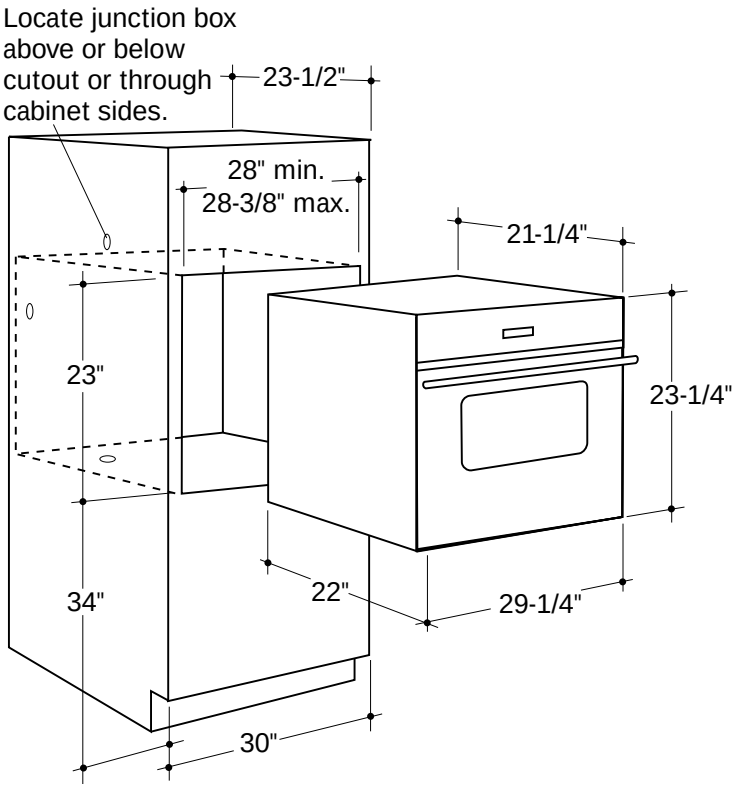

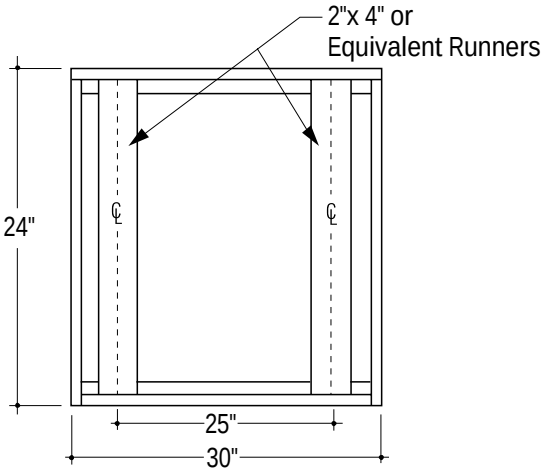

Must Support 200 lbs.

Cutout Dimensions:

Height 23" max.
Width 28" min.
28-3/8" max.
Depth 23-1/2" min.

Cabinet depth required from front frame to inside rear cabinet wall.

Monogram Built-In Convection Single Ovens require a separate, properly grounded 3-wire 208/120 or 240/120 volt, 60Hz power supply, protected by a time delay fuse or circuit breaker. Ovens are supplied with a flexible power cable.

Convection single ovens are rated at 3.3 KW at 240 volts and 2.8 KW at 208 volts.

Installation Information:

Before installing, consult installation instructions, packed with the product, for current dimensional data and for alternate installation options.

For answers to your Monogram,® GE Profile Performance Series,™ GE Profile™ or GE appliance questions, call GE Answer Center® service, 800.626.2000.

Listed by Underwriters Laboratories

Specification Created 8/99

Monogram™

ZET837BBBB - GE Monogram™ 30" Single Convection Wall Oven

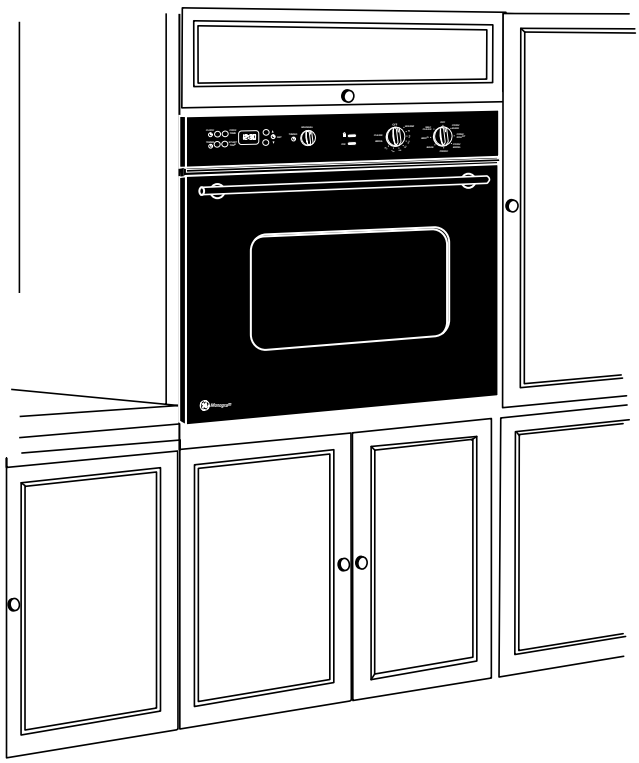

Features and Benefits

- Convection Self-Cleaning Oven
- Electronic Clock and Kitchen Timer
- Convection Bake and Convection Roast
- Convection Broil
- Bread Proofing Mode
- Timed Cooking
- Concealed Bake Element
- 3,000-Watt Variable Broil with Twelve-Pass Broil Element
- Porcelain-Enameled Broiler Pan with Chrome-Plated Grid
- Self-Clean Delay Option with Automatic Door Lock
- 3 Removable Racks and 4 Rack Positions
- Convection Roasting Rack and Convection Floor Rack
- Preheat Light
- Frameless Glass Oven Door
- Tubular Stainless Steel Handle
- 30" Oven Cabinet Width Required
- Model ZET837WBWW - White on white
- Model ZET837BBBB - Black on black
- Model ZET837SBSS - Stainless steel
- Model ZET837DBSB - Stainless steel on black

Specification Created 8/99